


MONOS ecoBACK PLUS

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/10" Loop Tufté 1/10" Bouclé Getuftet 1/10" Schlinge Getuft 1/10" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _{fl} -s1, tackified
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% PA solution dyed nylon 75% recycled content	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBACK PLUS fully recyclable carpet tile backing with 85% recycled and renewable content	RUBBING FASTNESS SOLIDITÉ AU FROTTMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 2.800 g/m ²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 500 g/m ²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0.068 m ² K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 330 g/m ²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNG- MAB GELUIDSISOLATIE	ISO 10140 ΔL _w : 24 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTAAL DIKTE	Ca. 5,4 mm	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,15
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 2,8 mm	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHT POOLDICHTHEID	Ca. 0,118 g/cm ³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1 x 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 171.600 /m ²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 cm x 50 cm box: 6 m ² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33 - LC1	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	36
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	ISO 4918 A : continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2%
CRADLE TO CRADLE CERTIFIED®	Gold level according to version 4.0 106, 319, 326, 419, 642, 827, 844, 847, 883, 908, 911, 968, 979, 989, 990 Silver level according to version 4.0 152, 204, 280, 283, 346, 406, 452, 517, 530, 553, 567, 577, 582, 592, 603, 606, 626, 823, 957, 983, 991	GUT-NR	40CA866B
		LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulyss is member of DGNB, the German Sustainable Building Council.

* For more information, see the modulyss sustainable datasheets. - Remark: Products are not reviewed under LEED®, LEED® credit requirements cover the performance of materials in aggregate, not the performance of individual products of brands. The LEED® green building certification program is the nationally accepted benchmark for the design, construction, and operation of green buildings. For more information on LEED®, visit www.usgbc.org/contact.

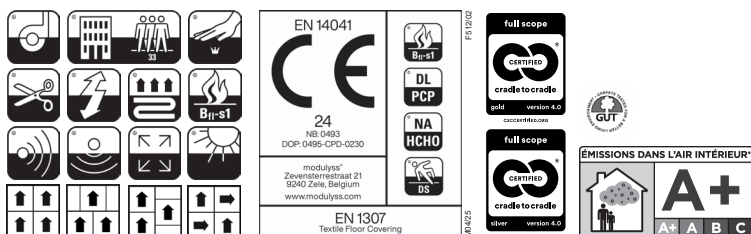

We reserve all rights for technical improvements | Technische wijzigingen, ter verbetering van het product, worden voorbehouden | Sous réserve de toute modification technique visant à l'amélioration constante de nos produits | Durch technische Weiterentwicklung sind bedingte Änderungen vorbehalten

modulyss®